


Receiver

SETUP

INSTRUCTIONS

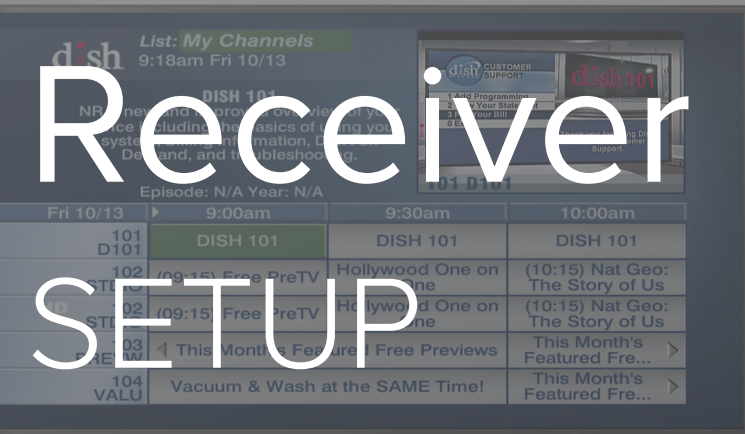

HELPFUL TIPS


- If you are not seeing the screens listed in this guide, try changing your TV's input by pressing the "Source/Input" button on your TV.
- In step 7, your replacement receiver will test your Internet and phone connection. If the results display as "not available," ensure the cords are connected to the appropriate ports on the back of your receiver and to your phone/modem.
- To find your closest UPS dropoff location or to schedule a pickup at your cost, call 1-800-742-5877 or visit [ups.com/dropoff](https://www.ups.com/dropoff).

Do you have questions?


Take a look at the back cover of this guide for this contact information!

01

Disconnect Your Cables and Remote Antenna




A Locate the power cable for the receiver that you are replacing, and unplug it from the wall.



B Locate the antenna connected to the “Remote Antenna” port. Then unscrew the antenna from the receiver. **(You may not have this antenna.)**



C Locate the cable(s) connected to the “Satellite In” ports, and then unscrew the cable(s) from the receiver. Do not unscrew the cable(s) from the wall.

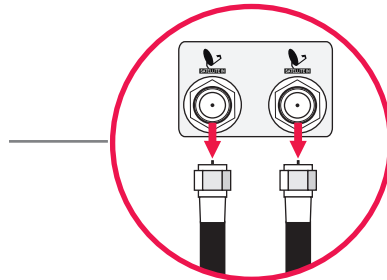


01

Disconnect Your Cables and Remote Antenna

D Determine the cable you are using to receive audio/visual signal. Then unplug it from the receiver, but not from your TV.

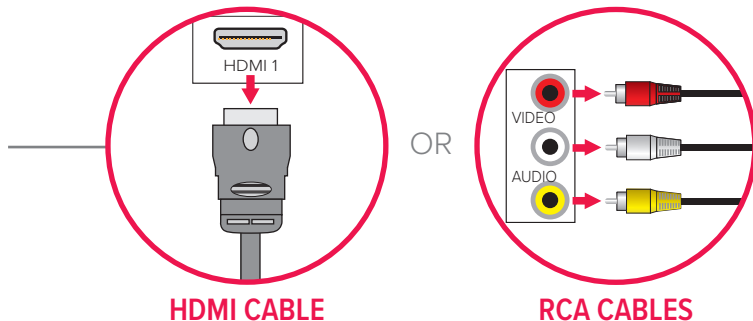


E Locate the cable connected to the “Ethernet” port. Then, unplug the cable from the receiver. Do not unplug it from the wall. **(You may not have this cable.)**




F Locate the cable connected to the “Phone” port. Then unplug the cable from the receiver. Do not unplug it from the wall. **(You may not have this cable.)**

02

Connect Your Cables and Remote Antenna

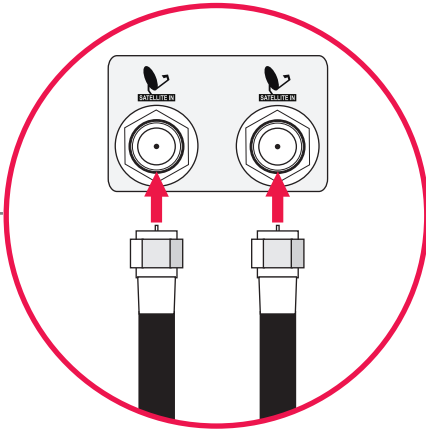



A Connect the Satellite In cable(s) to the “Satellite In” port(s) on your replacement receiver.

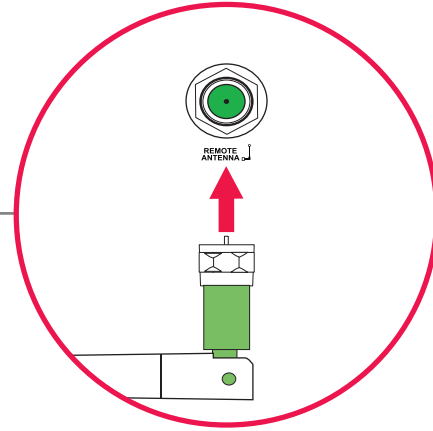


B Connect the remote antenna to the “Remote Antenna” port on your replacement receiver. **(You may not have this antenna.)**

02 Connect Your Cables and Remote Antenna

C Connect either the RCA cables or the HDMI cable to the corresponding port(s) on your replacement receiver.

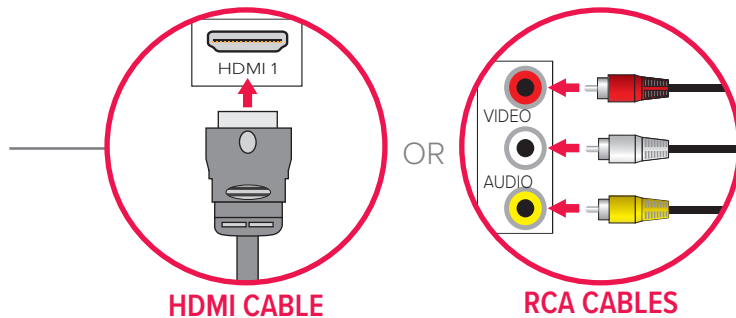


D Connect the Ethernet cable to the “Ethernet” port on your replacement receiver. **(You may not have this cable.)**




E Connect the Phone cable to the “Phone” port on your replacement receiver. **(You may not have this cable.)**

03

Power Your Equipment

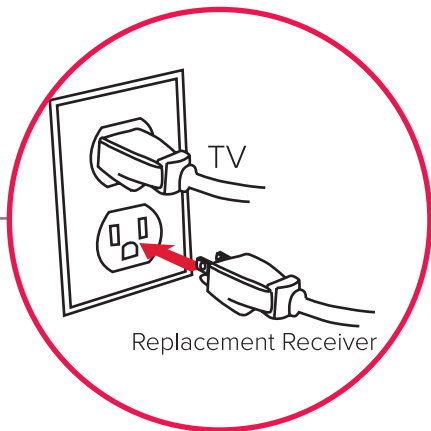

A Plug the power cord from your receiver into a power outlet, and ensure that your TV is still plugged in. Turn on your TV. It could take up to 30 seconds for you to see any images.

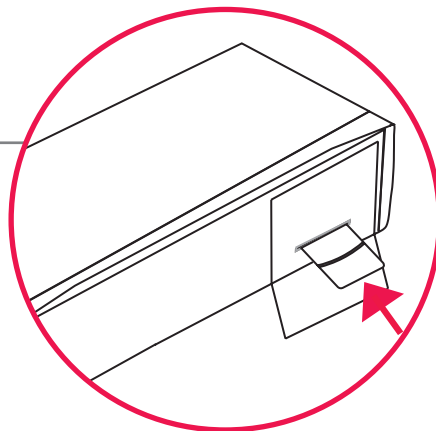

B Make sure that the SmartCard is secured firmly in the slot on the front of your receiver.

04

Program Your Remote




A Your screen should now display the Program TV Remote to Receiver screen. Follow the onscreen instructions to program your remote to the replacement receiver.




B Once your remote is programmed, use the arrow buttons on your remote to highlight "Continue," and then press Select.

05

Download Receiver Software

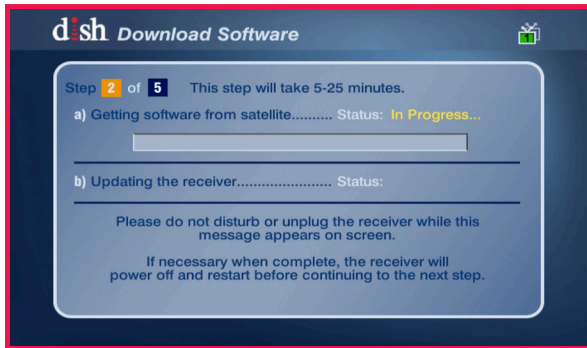


A Your receiver will start downloading software automatically.

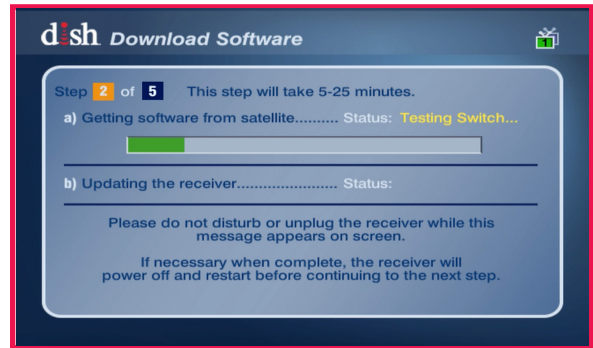


B Once the software download is complete, your receiver will update automatically.

06

Set Your TV Configuration

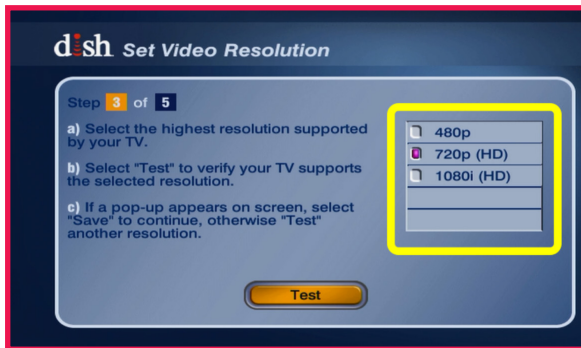


A Follow the onscreen instructions to set your TV's video resolution so the picture will display properly.

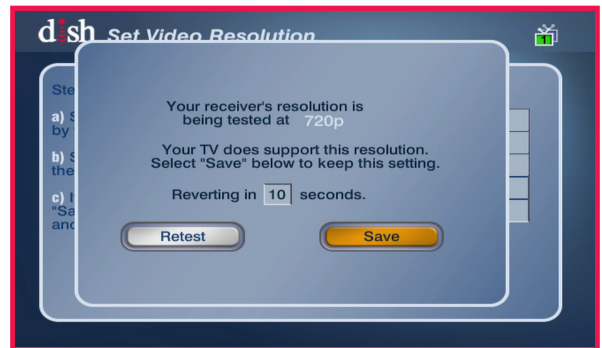


B Once your TV resolution is set, use the arrow buttons on your remote to select "Save," and then press Select.

07

Test Your Internet & Phone Connection

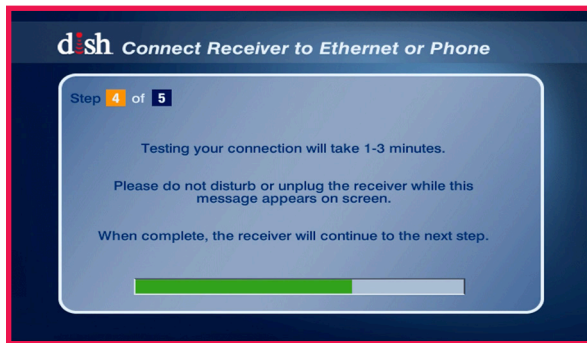


A Your receiver will automatically test your Internet and phone connection.

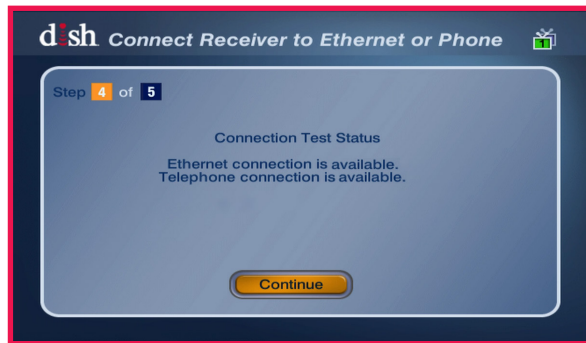


B Once complete, your receiver will display your connection status. Use the arrow buttons on your remote to highlight "Continue," and then press Select.

08

Activate Your Receiver

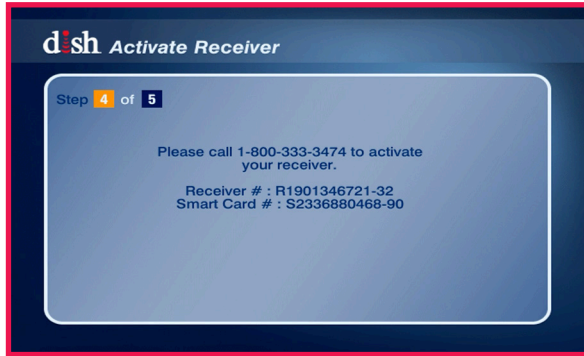

A Please call 1-800-333-DISH (3474) to activate your replacement receiver. Note that you will need to provide the receiver and SmartCard numbers onscreen to the DISH agent.

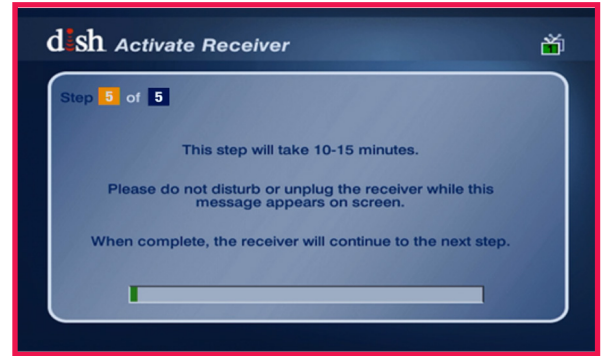


B Your receiver will go through the activation process, which can take up to 15 minutes.

09

Acquire Satellite Signal




A Use the arrow buttons on your remote to highlight “Live TV,” and then press Select.

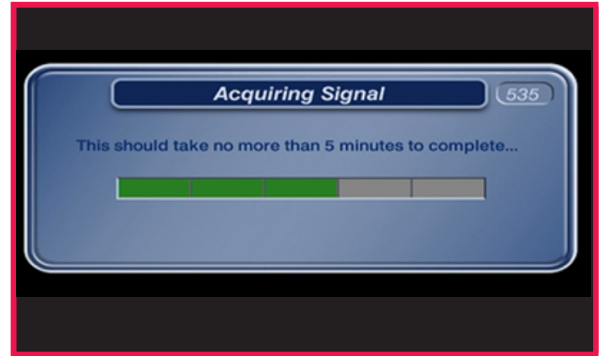

B Your receiver will automatically acquire satellite signal.

10

Download Program Guide

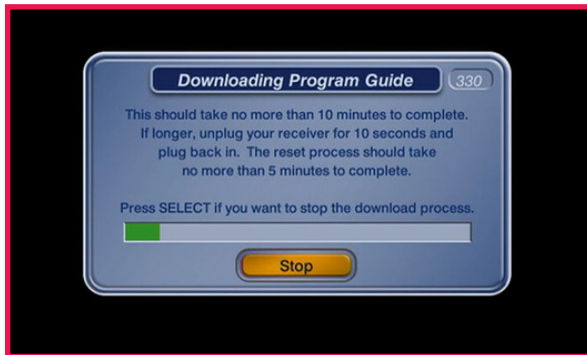


A Your receiver will automatically download the program guide.



B Once complete, your screen will display live TV.

11

Recycle Your Original Receiver



A Open the front panel on your original receiver and take out the SmartCard. Then cut the SmartCard lengthwise through the main chip.



B Visit mydish.com/recycle to find an e-waste recycling facility near you. Take your receiver to that facility.

Have questions?

Let us help!



Get product support information at mydish.com/support.



Find helpful instructional videos at youtube.com/user/dish.



Chat with a human being by visiting us at mydish.com/chat.

- OR -



Call us at 1-800-333-DISH (3474).

We want to hear from you

so that we can keep delivering what you need to enjoy your TV service.



Share your thoughts at mydish.com/tunedintoyou.